
7/16" X 3" slot

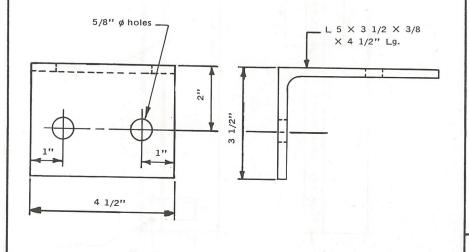

SPECIFICATIONS

Rail support angles shall conform to A.S.T.M. A36 and shall be galvanized in accordance with A.S.T.M. A123 except when corrosion resistant posts are requested, in which case support angles shall conform to A.S.T.M. A588 and shall not be painted or galvanized.

No punching, drilling or cutting will be permitted after galvanizing.

Dimensional tolerances not shown or implied are intended to be those consistent with the proper functioning of the part, including its appearance, and accepted manufacturing practices.

INTENDED USE

This angle is used in connecting rail elements to posts in the standard Box Beam Guardrail system $\,G3$.

G3 RAIL SUPPORT ANGLE (STEEL)

HM-TF-13

STANDARD

P-5-76