


NOTES:

1. Stamping shall be completed on any W6x8.5 or W6x9 Guardrail Post that is longer than the specifying agency's standard length for strong-post W-Beam Guardrail system.
2. Stamping options, such as character size and location will be per manufacturer's preference and in accordance with their processes & equipment. All options within the tolerances shown on this drawing shall be acceptable to the specifying agency.
3. Stamping shall be performed prior to galvanizing, legible after galvanizing, and permanent.
4. Stamping shall remain visible in the field after final assembly.



EXTRA LONG WIDE-FLANGE GUARDRAIL POST LABELING

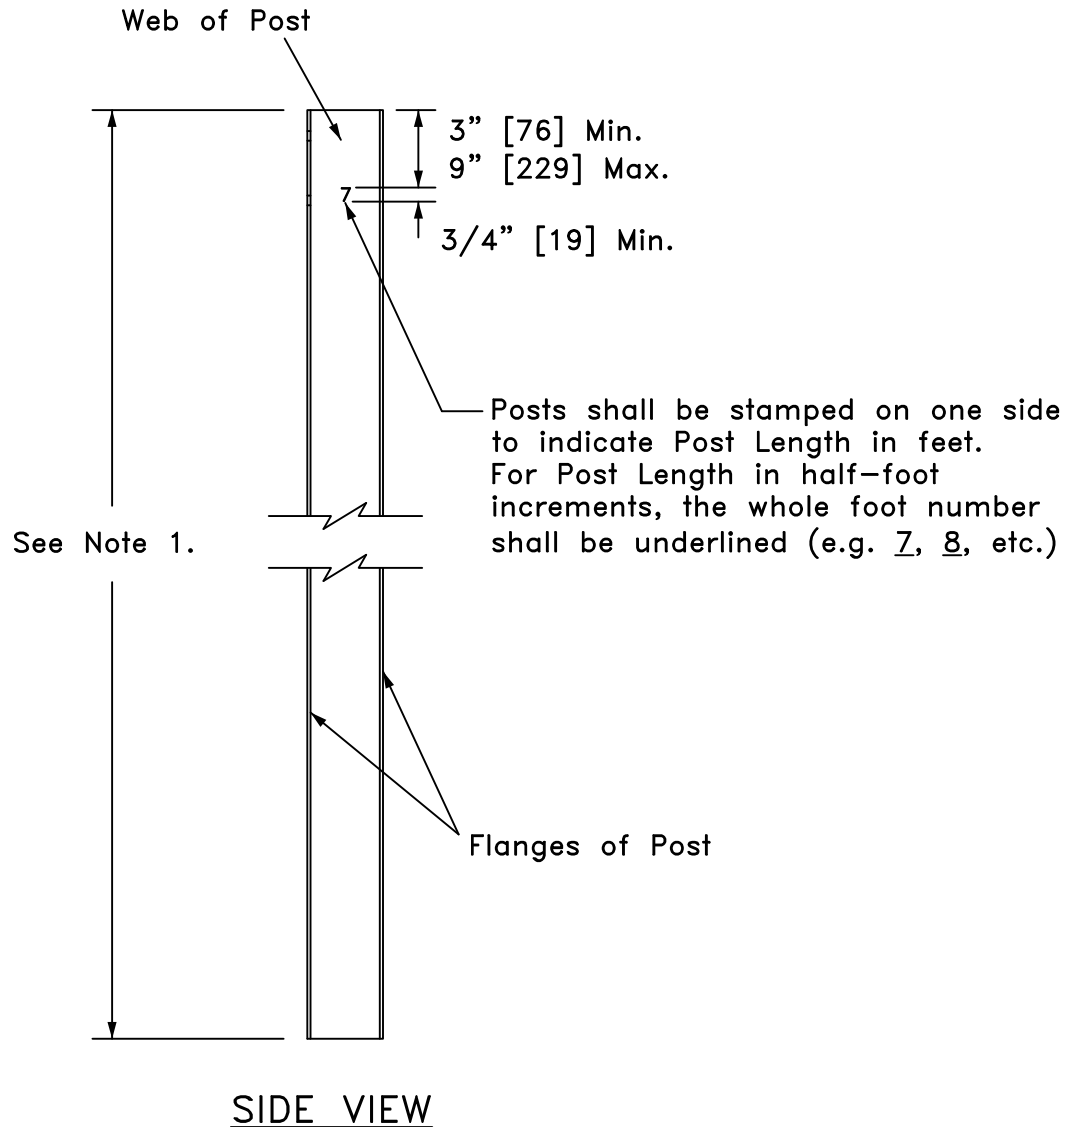


PWE14

SHEET NO.

DATE:

1 of 2

10/4/2019

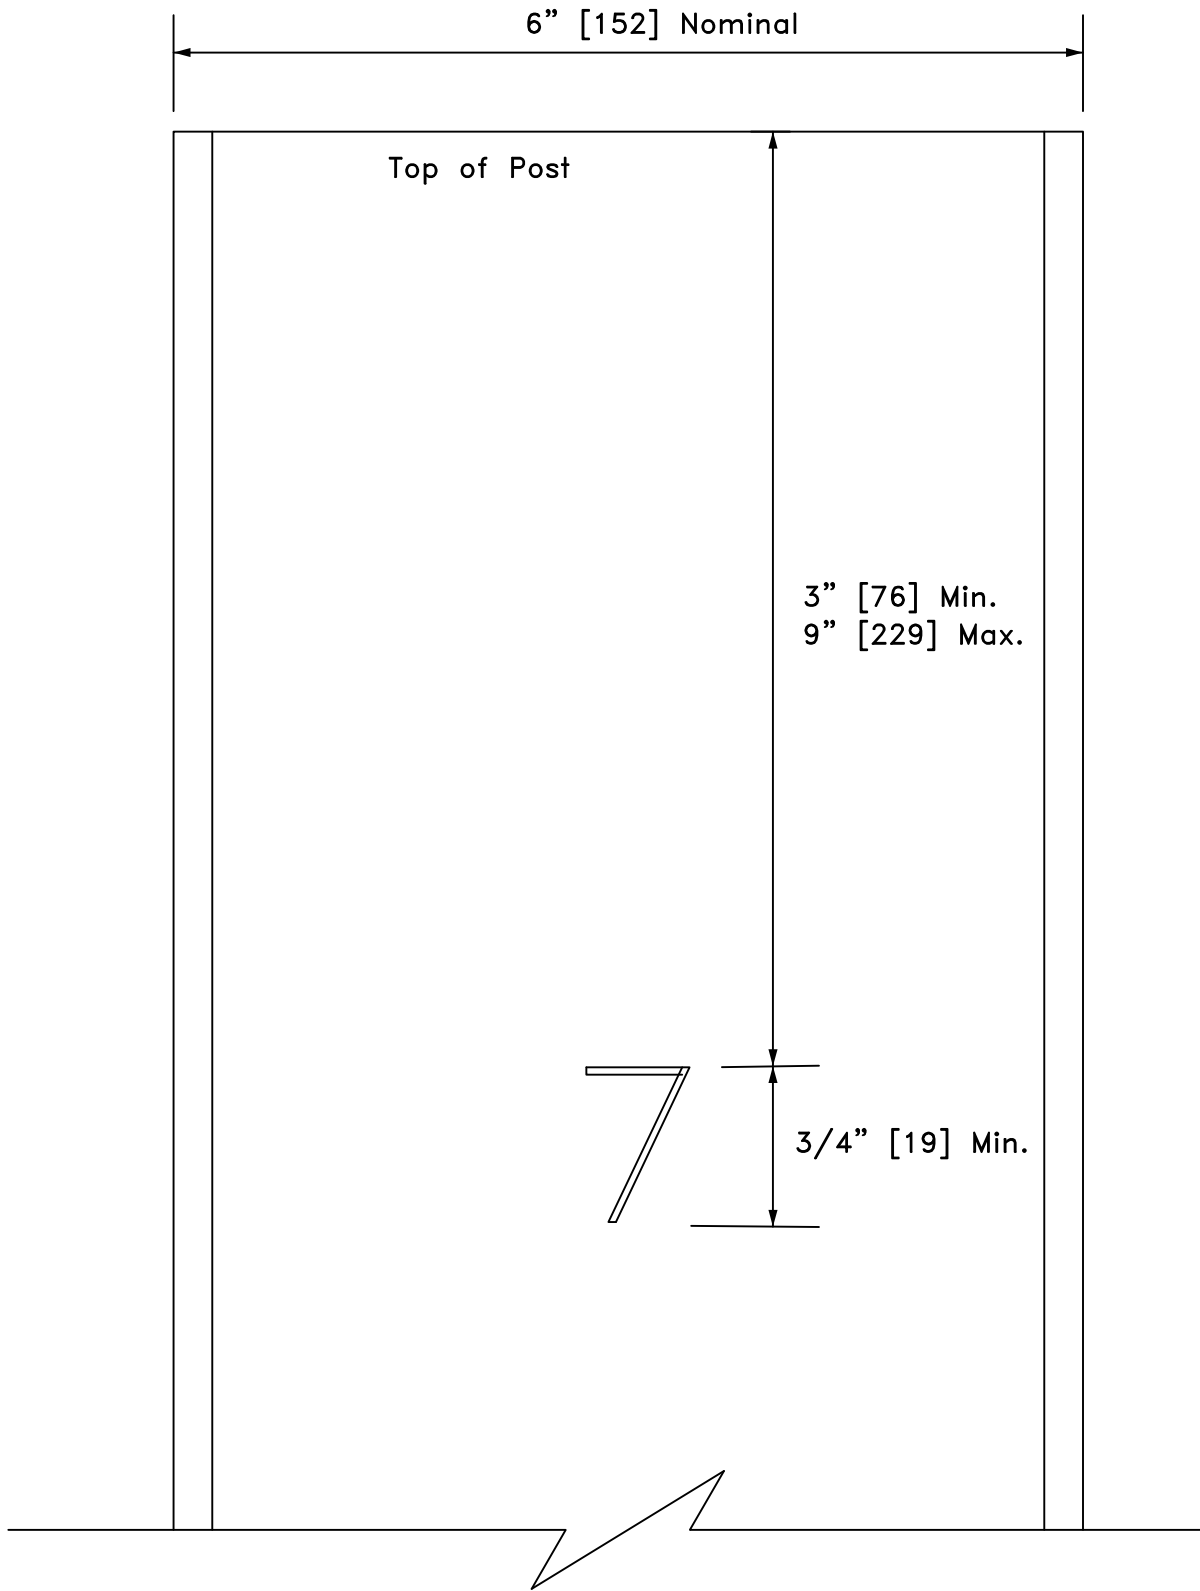

SIDE VIEW

EXTRA LONG WIDE-FLANGE GUARDRAIL POST LABELING



PWE14

SHEET NO.

DATE:

2 of 2

10/4/2019