


| PLATE DESIGNATOR | PLATE THICKNESS |
|------------------|-----------------|
| PLS02a | 1/8 in [3.2] mm |

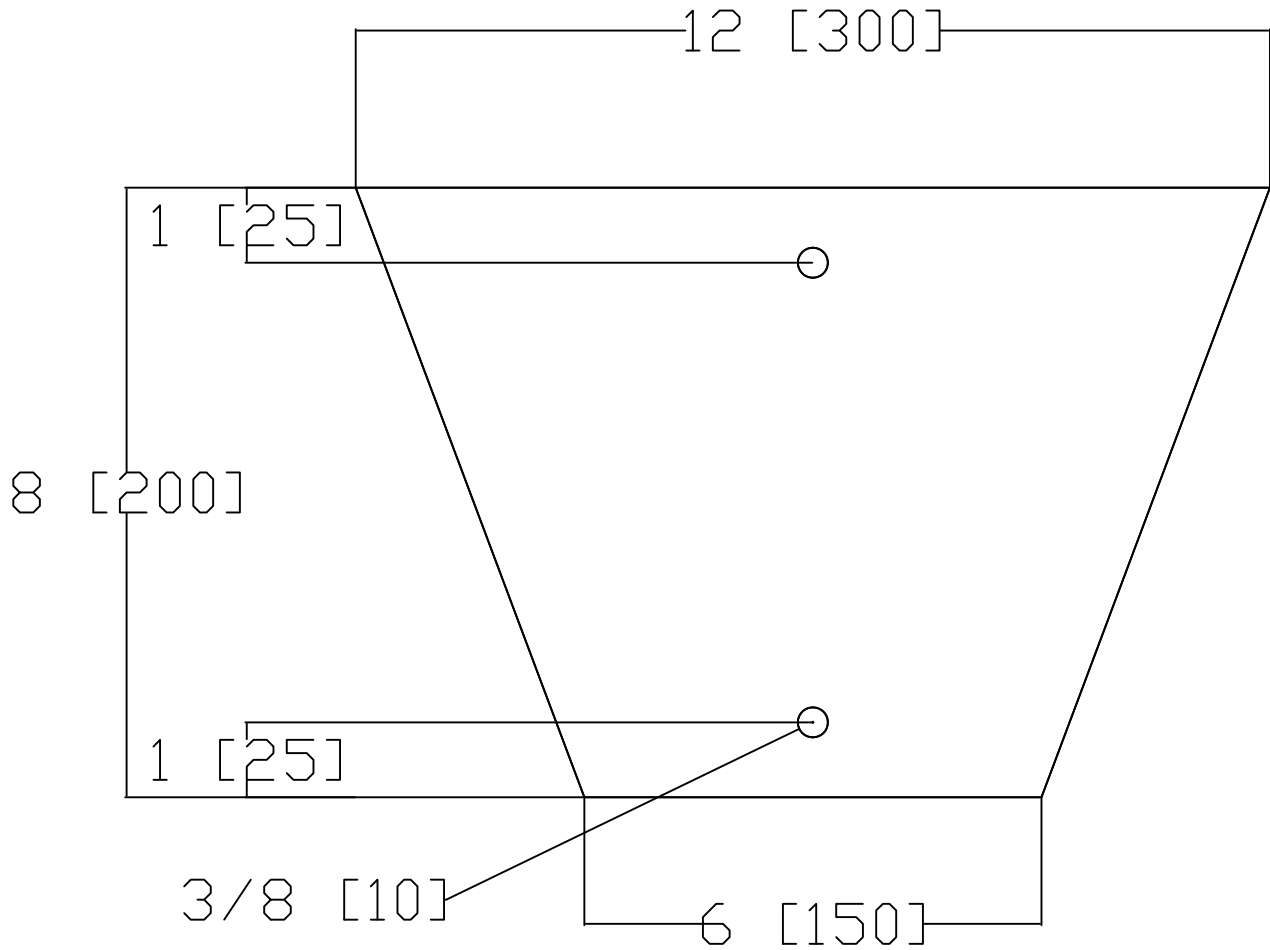

FRONT VIEW

SOIL PLATE CAN BE PLACED ON FRONT OR BACK OF POST.
CONNECTION BOLT LENGTH VARIES BY THE MOUNTING METHOD.

UNITS: IN [MM]

SOIL PLATE

NUCOR
 BAR MILL GROUP
 NUCOR STEEL MARION, INC.

PLS02a

| | |
|-----------|------------|
| SHEET NO. | DATE: |
| 1 of 2 | 10/01/2011 |

SPECIFICATIONS

The soil plate shall be manufactured from ASTM A-36 Grade Steel (or equivalent) and shall be galvanized in accordance with ASTM A-123.

INTENDED USE

The Soil Plate may be used wherever required for weak soil conditions, as a component in the Nucor Steel Marion Inc systems. These include the Direct Burial U-Post system (SSF40), Lap-Splice systems (SSP04 & SSP14) and Slip-Safe Systems (SSS14 & SSS15).

CONTACT INFORMATION

Nucor Steel Marion Inc., 912 Cheney Avenue, Marion, Ohio 43301-1801

(800) 333-4011

(740) 383-6429 Fax

www.nucorhighway.com

** All Nucor Steel Marion Inc. products are produced from 100% recycled steel.*



SOIL PLATE

PLS02a

NUCOR

BAR MILL GROUP

NUCOR STEEL MARION, INC.

SHEET NO.

DATE

2 of 2

10/01/2011