


DESIGNATOR	BASE METAL THICKNESS
RWT01a	2.67
RTW01b	3.43

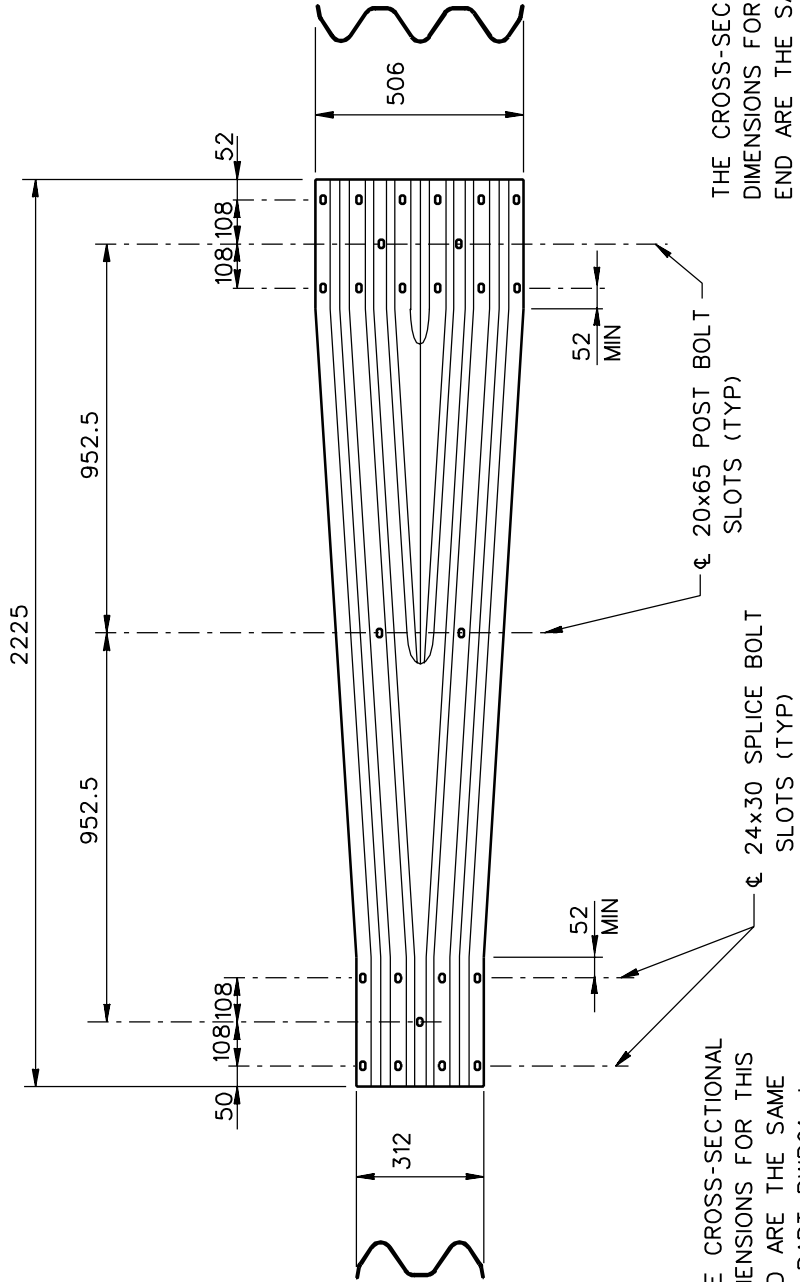

THE CROSS-SECTIONAL DIMENSIONS FOR THIS END ARE THE SAME AS PART RTM01a

THE CROSS-SECTIONAL DIMENSIONS FOR THIS END ARE THE SAME AS PART RWB01a-b

1994

W-THRIE BEAM TRANSITION SECTION

RWT01a-b

SHEET NO.	REF. NO.
1 of 2	RE-69-76

SPECIFICATIONS

Corrugated sheet steel beams shall conform to the current requirements of AASHTO M180. Transition section RWT01a shall conform to AASHTO M180 Class A and RWT01b shall conform to Class B. Corrosion protection may be either Type II (zinc-coated) or Type IV (corrosion resistant steel). Type IV guardrails shall be manufactured using AASHTO M270M (ASTM A709M) Grade 50W material and shall not be zinc-coated, painted or otherwise coated.

Dimensional tolerances not shown or implied are intended to be those consistent with the proper functioning of the part, including its appearance and accepted manufacturing practices.

INTENDED USE

RWT01a-b transition sections are used in various guardrail systems.

W-THREE BEAM TRANSITION SECTION

RWT01a-b	
SHEET NO.	DATE
2 of 2	1995