


DESIGNATOR	BASE METAL THICKNESS
RWE03a	2.67

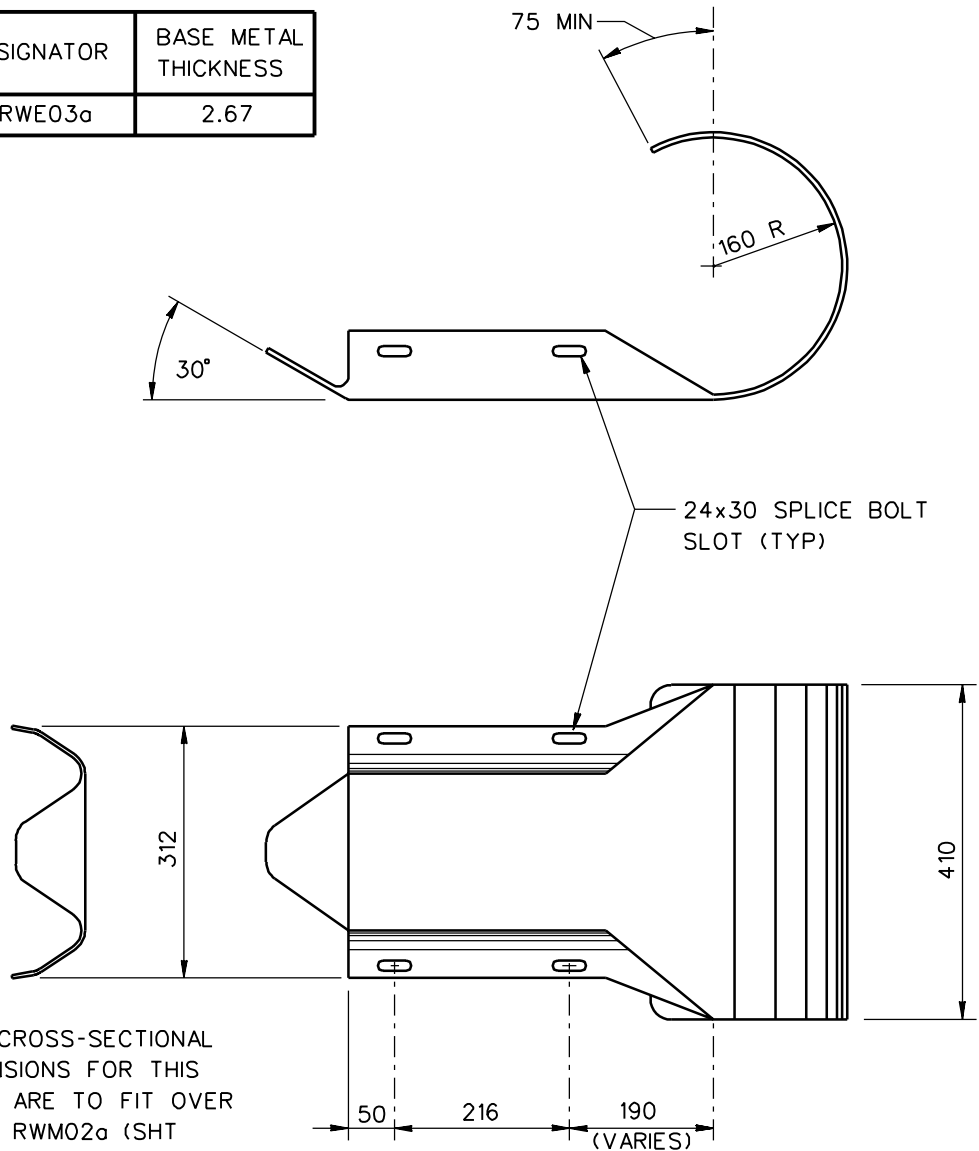

THE CROSS-SECTIONAL DIMENSIONS FOR THIS PART ARE TO FIT OVER PART RWM02a (SHT 3 of 4).

1994

W-BEAM END SECTION (ROUNDED)

RWE03a

SHEET NO.	REF. NO.
1 of 2	RE-6-79

SPECIFICATIONS

Rounded W-beam end sections shall conform to the current requirements of AASHTO M180. End section RWE03a shall conform to AASHTO M180 Class A and RWE03b shall conform to Class B. Corrosion protection may be either Type II (zinc-coated) or Type IV (corrosion resistant steel). Type IV end sections shall be manufactured using AASHTO M270M (ASTM A709M) Grade 50W material and shall not be zinc-coated, painted or otherwise coated.

Dimensional tolerances not shown or implied are intended to be those consistent with the proper functioning of the part, including its appearance and accepted manufacturing practices.

INTENDED USE

RWE03a rounded end sections are used in W-beam guardrail terminal systems.

W-BEAM END SECTION (ROUNDED)

RWE03a

SHEET NO.

DATE

2 of 2

1995