


**A.2 DETAILS OF 50-INCH TALL PRECAST F-SHAPE CONCRETE BARRIER
KEYED IN 4 INCHES OF ASPHALT**

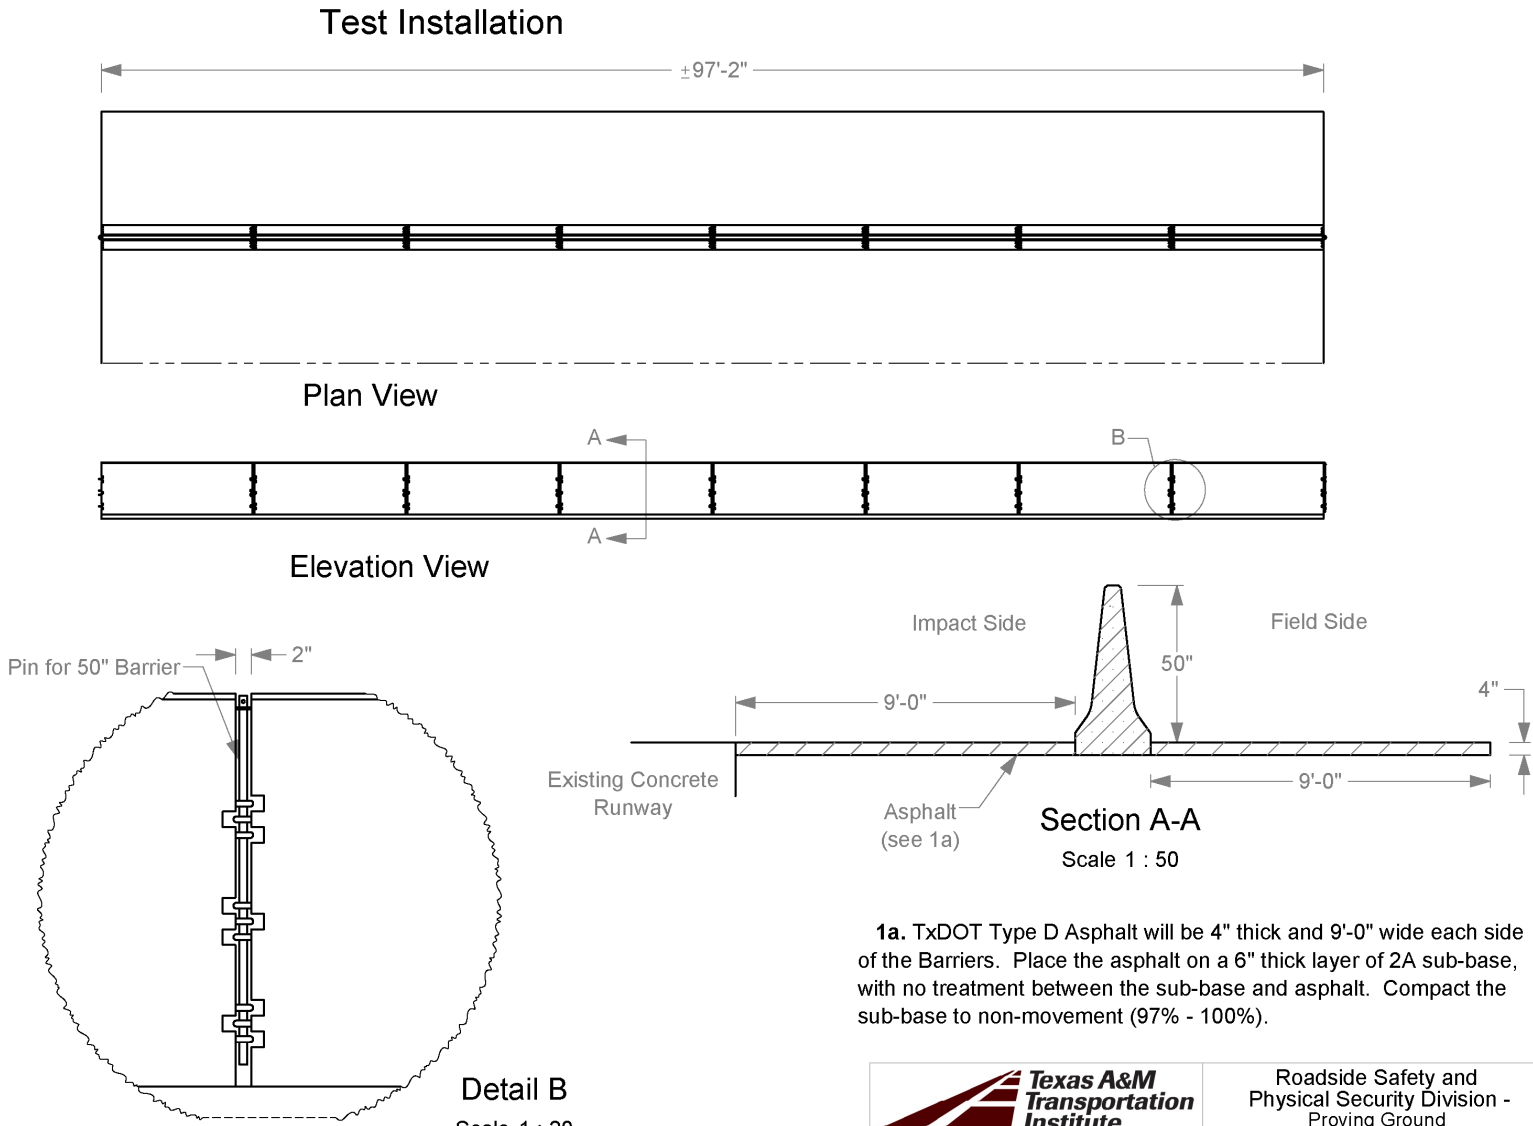


1a. TxDOT Type D Asphalt will be 4" thick and 9'-0" wide each side of the Barriers. Place the asphalt on a 6" thick layer of 2A sub-base, with no treatment between the sub-base and asphalt. Compact the sub-base to non-movement (97% - 100%).

	Roadside Safety and Physical Security Division - Proving Ground	
	Project #611851-4 PA 50-inch Precast Barrier	2020-02-27
Drawn by GES	Scale 1:150	Sheet 1 of 3 Test Installation

Q:\Accreditation-17025-2017\EIR-000 Project Files\611851-F-Shape Median Barrier-Bullard_Moran\Drafting_611851-2020-02-27\611851-4 Drawing


Barrier Details

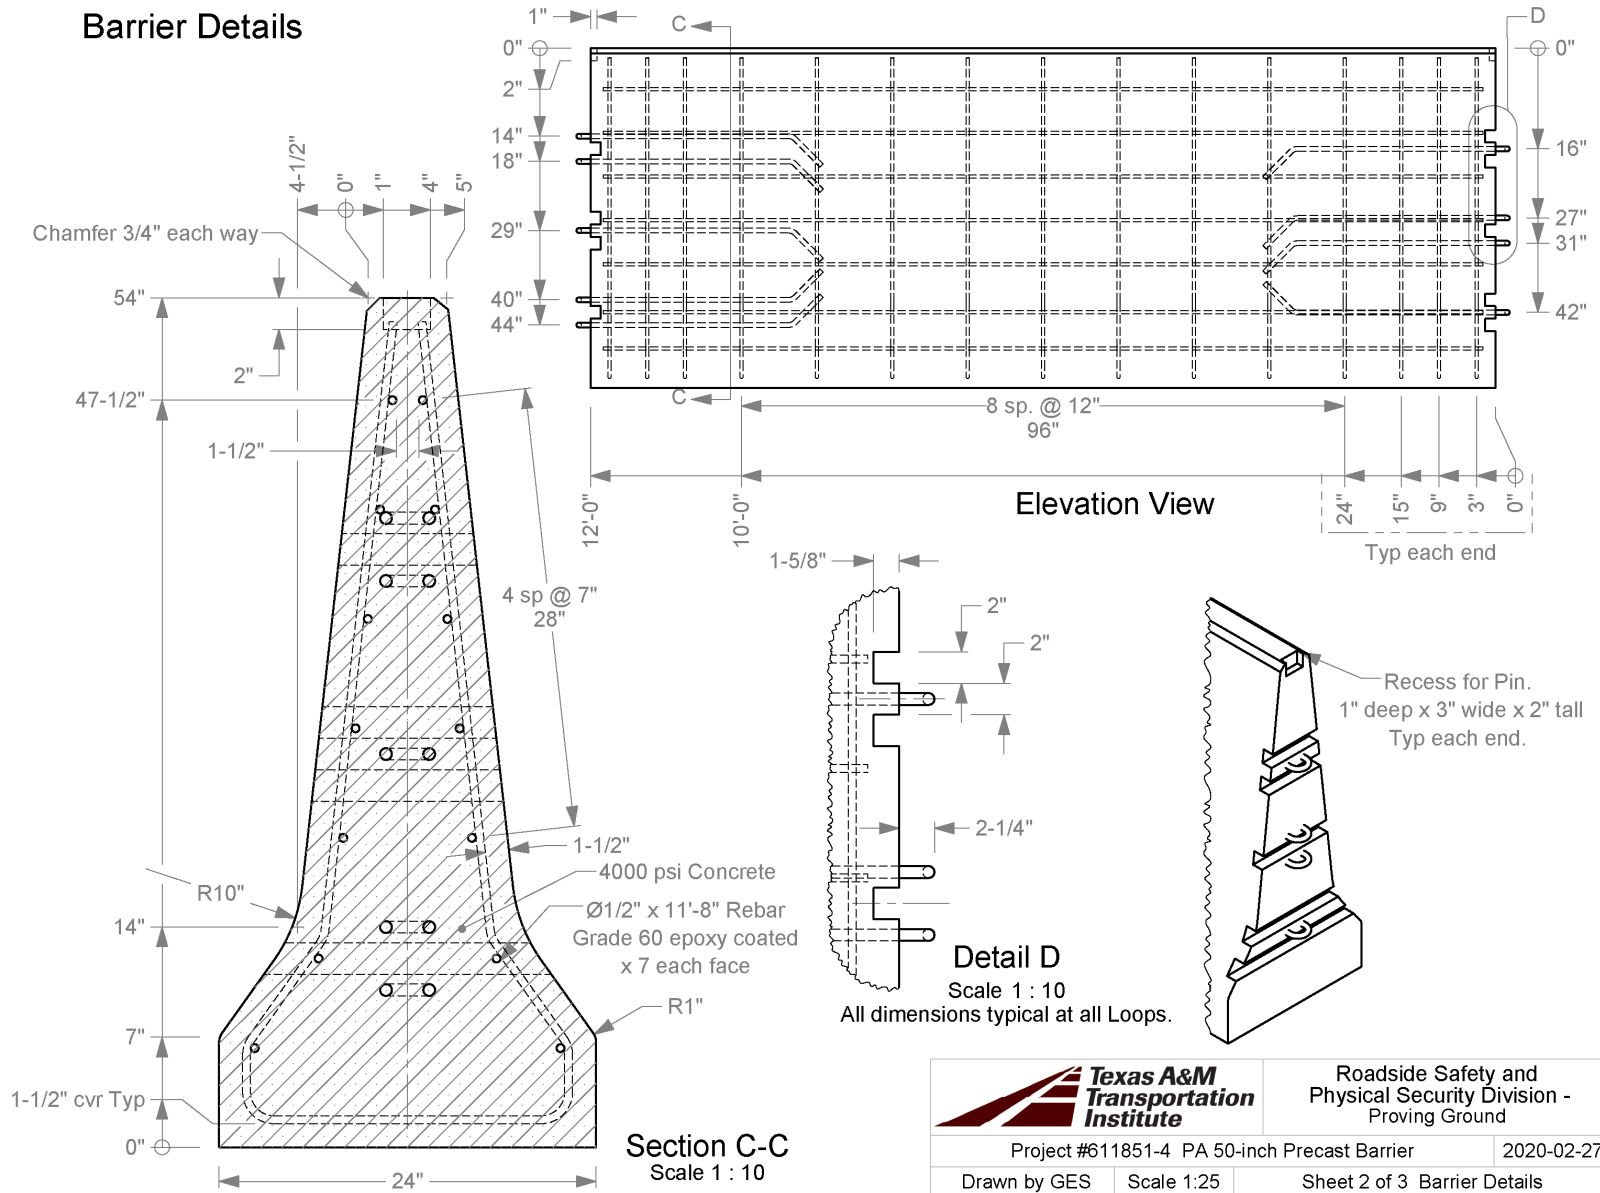


Roadside Safety and
Physical Security Division -
Proving Ground

Project #611851-4 PA 50-inch Precast Barrier		2020-02-27
Drawn by GES	Scale 1:25	Sheet 2 of 3 Barrier Details

Q:\Accreditation-17025-2017\EIR-000 Project Files\611851-4-F-Shape Median Barrier -Bullard_Moran\Drafting_611851-2020-02-27\611851-4 Drawing

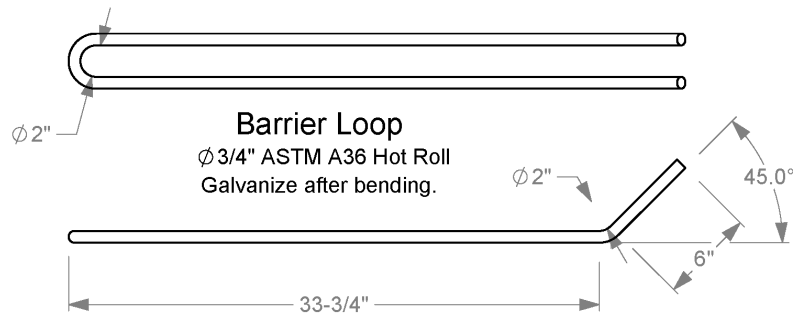


Barrier Loop
 $\phi 3/4''$ ASTM A36 Hot Roll
 Galvanize after bending.

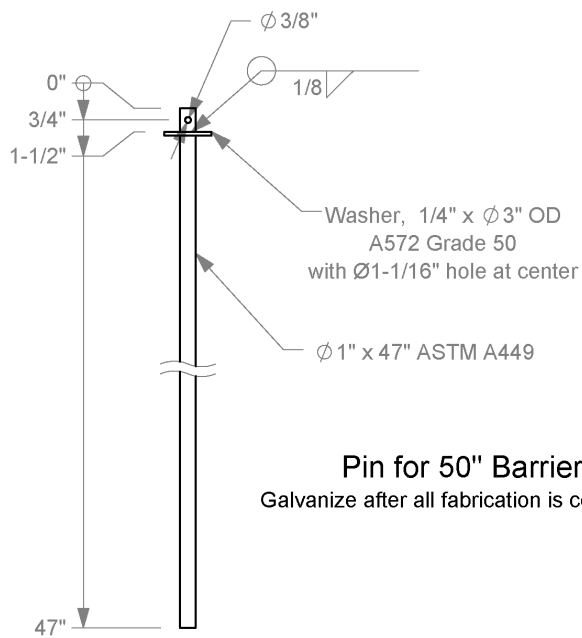

Pin for 50" Barrier
 Galvanize after all fabrication is complete.

Parts

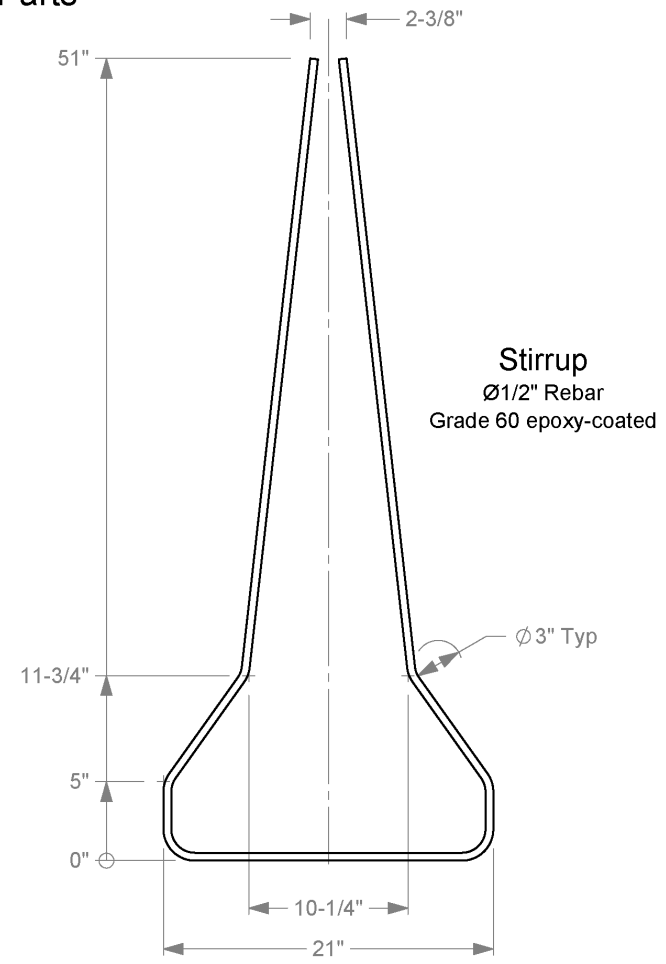

Stirrup
 $\phi 1/2''$ Rebar
 Grade 60 epoxy-coated



Roadside Safety and
 Physical Security Division -
 Proving Ground

Project #611851-4 PA 50-inch Precast Barrier		2020-02-27
Drawn by GES	Scale 1:10	Sheet 3 of 3 Parts

Q:\Accreditation-17025-2017\EIR-000 Project Files\611851-F-Shape Median Barrier -Bullard_Moran\Drafting_611851-2020-02-27\611851-4 Drawing