




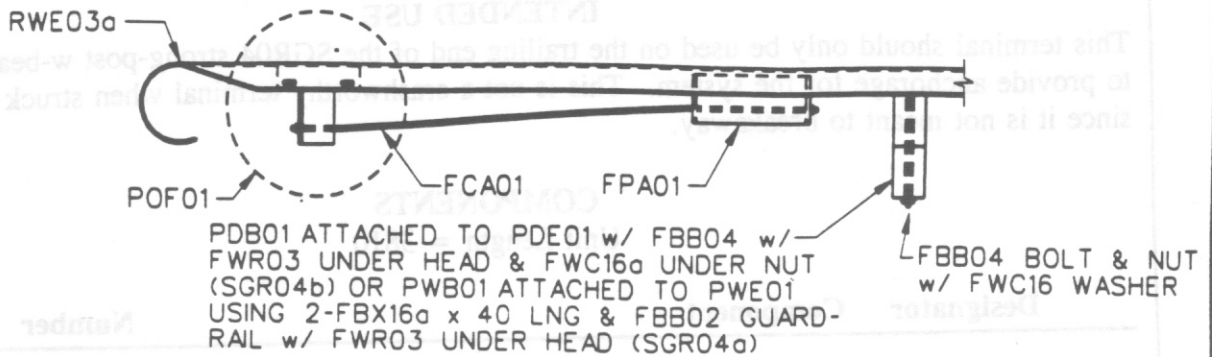

PLAN

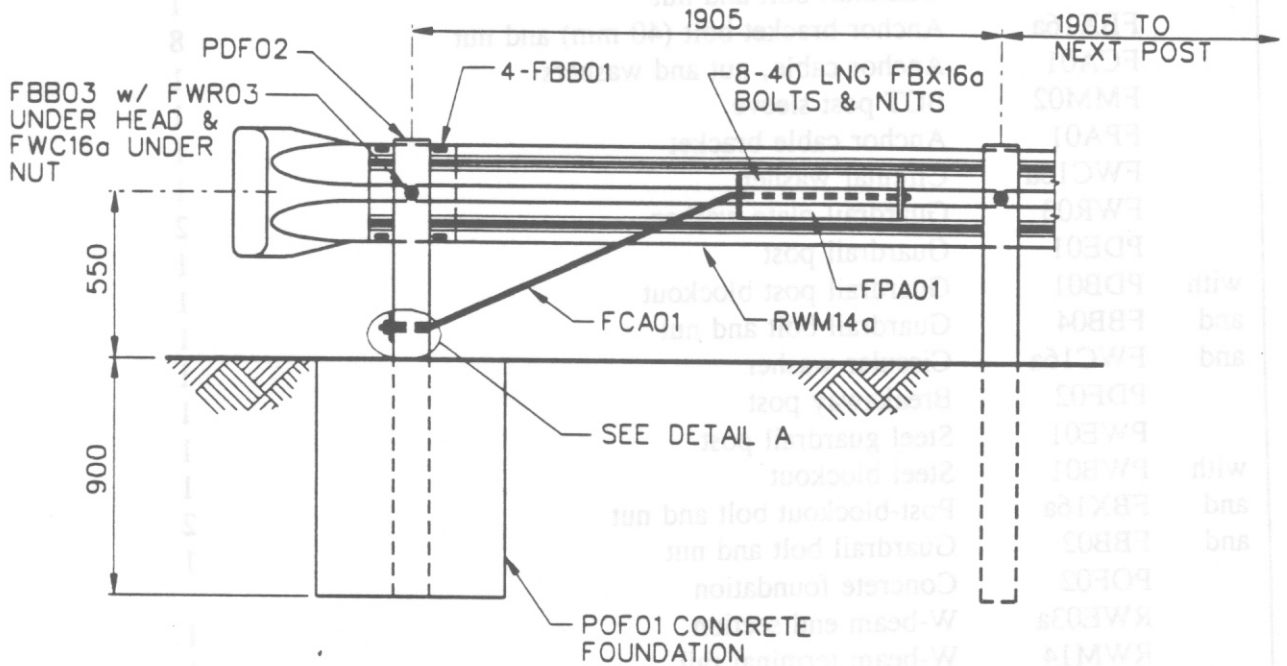

ELEVATION

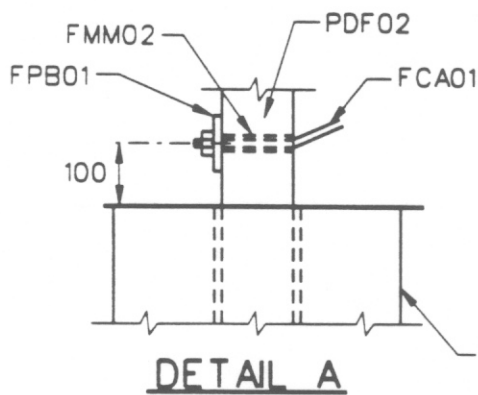

DETAIL A

NOTE:

POLYSTYRENE SHEETING, COMPOSITION PAPER OR SOME OTHER MATERIAL SHALL BE WRAPPED AROUND THE CONCRETE EMBEDDED PORTION OF THE POST TO AID IN REMOVING BROKEN OR DAMAGED POSTS.

1994

TRAILING END TERMINAL-CONCRETE FOOTING OPTION



SEW02b

SHEET NO.

REF. NO.

1 of 2

INTENDED USE

This terminal should only be used on the trailing end of the SGR04 strong-post w-beam guardrail to provide anchorage for the system. This is not a crashworthy terminal when struck head-on since it is not meant to breakaway.

COMPONENTS

Unit Length = 3810

Designator	Component	Number
FBB01	Splice bolts and nuts	12
FBB01	Guardrail bolt and nut	1
FBX16a	Anchor bracket bolt (40 mm) and nut	8
FCA01	Anchor cable, nut and washers	1
FMM02	BCT post sleeve	1
FPA01	Anchor cable bracket	1
FWC16a	Circular washer	1
FWR03	Guardrail plate washer	2
PDE01	Guardrail post	1
with PDB01	Guardrail post blackout	1
and FBB04	Guardrail bolt and nut	1
and FWC16a	Circular washer	1
PDF02	Breakaway post	1
PWE01	Steel guardrail post	1
with PWB01	Steel blackout	1
and FBX16a	Post-blockout bolt and nut	2
and FBB02	Guardrail bolt and nut	1
POF02	Concrete foundation	
RWE03a	W-beam end section	1
RWM14	W-beam terminal rail	1

TRAILING END TERMINAL-CONCRETE FOOTING OPTION

SEW02b

SHEET NO.

REF. NO.

2 of 2

