
GATE	OPENING WIDTH ft-in [mm]	OVERALL LENGTH ft-in [mm]
8 Meter	28'-0" [8530]	44'-0" [13420]
12 Meter	41'-0" [12500]	57'-2" [17420]
16 Meter	54'-0" [16500]	70'-4" [21425]



ARMORGUARD® GATE

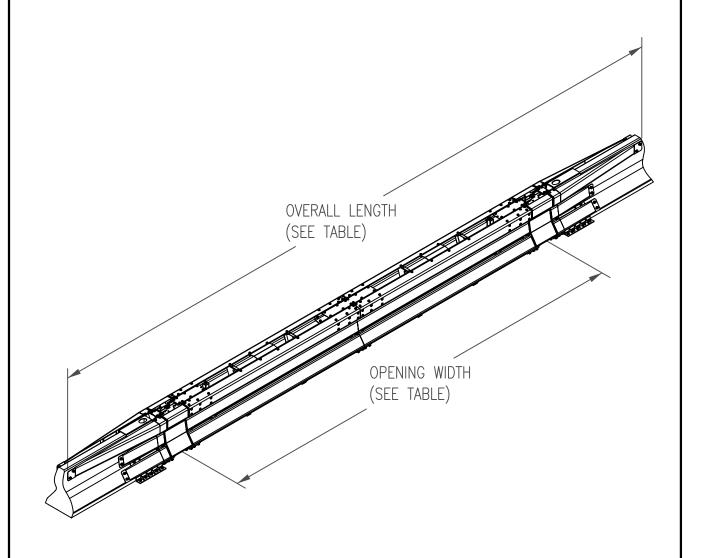

Lindsay Transportation Solutions 180 River Road Rio Vista, CA 94571 Tel: 888–800–3691 www.barriersystemsinc.com

SGM23		
T NO.	DATE:	

SHEET NO. DATE:

1 OF 1 06/19/13

INTENDED USE

The ArmorGuard® Gate system is used as a moveable longitudinal barrier section that can be installed in openings of rigid barrier systems. The purpose of the system is to create a crashworthy closure for rigid longitudinal barrier openings that is capable of being opened by no more than two people in less than 5 minutes. The ArmorGuard® Gate system can provide an opening for emergency and maintenance vehicles, traffic redirection, and construction zone access through rigid barriers as well as many other applications. The test level 3 system provides 8, 12, or 16-meter openings.

The ArmorGuard® Gate system is hinged at both ends and uses manual or pneumatic jacking systems to raise the gate section onto casters. This enables the system to be unhinged and swung open from either end, or the whole gate section can be disconnected at both ends and moved in any direction. Contact manufacturer for further information and installation instructions.

APPROVALS

The ArmorGuard® Gate system has been fully tested in conformance with NCHRP Report 350 Test Level 3 and approved by FHWA.

FHWA Acceptance Letter: B-87, July 6, 2001

HSSD/B-173, March 25, 2008

CONTACT INFORMATION

Lindsay Transportation Solutions 180 River Rd. Rio Vista, CA 94571 www.barriersystemsinc.com Phone: 888-800-3691 or 707-374-6800

Fax: 707-374-6801 Email: info@barriersystemsinc.com

ARMORGUARD® GATE

SGM23

SHEET NO. DATE: 2 OF 2 06/19/13



Lindsay Transportation Solutions 180 River Road Rio Vista, CA 94571 Tel: 888–800–3691 www.barriersystemsinc.com